

**UTILITY PATENT APPLICATION  
TRANSMITTAL UNDER 37 CFR 1.53(b)**

**ATTORNEY DOCKET 79296F-P**

To: Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

**Express Mail Label No.**

**EM365154021US**

**METHOD AND APPARATUS FOR MAKING A  
PRINT HAVING AN INVISIBLE COORDINATE  
SYSTEM**

**Date:** June 24, 1999

**First Named Inventor (or Application Identifier):**

David L. Patton, et al

Enclosed are:

1. ☒ Specification
2. ☐ 8 Sheet(s) of drawing(s)
3. ☒ Information Disclosure Statement Under 37 CFR 1.97.
4. Combined Declaration for Patent Application and Power of Attorney:
  - 4a. ☒ New
  - 4b. ☐ Copy from a prior application (37 CFR 1.63(d) (for continuation/divisional with Box 11 completed)
5. ☐ Incorporation by Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☒ Assignment of the invention to **Eastman Kodak Company**
7. ☐ Certified copy of a priority document
8. ☐ Associate Power of Attorney
9. ☐ Deletion of Inventor(s). Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).

10. ☐ If a 111A application prior to examination of the above-identified application, amend the specification at Page 1, after the title, by inserting the following:  
--CROSS REFERENCE TO RELATED APPLICATION  
Reference is made to and priority claimed from U.S. Provisional Application Serial No. , filed , entitled .

**If a CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

11. ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: ,
12. ☒ Please address all written communications to Milton S. Sales, Patent Legal Staff, Eastman Kodak Company, 343 State Street, Rochester, NY 14650-2201.  
Please Direct all telephone calls to Frank Pincelli at (716) 726-1111.

The filing fee has been calculated as shown below:

FOR:	NO. FILED	NO. EXTRA	RATE	FEE
BASIC FEE				\$ 760
TOTAL CLAIMS	24 - 20 =	4	x 18 =	\$ 72
INDEPENDENT CLAIMS	9 - 3 =	6	x 78 =	\$ 468
MULTIPLE DEPENDENT CLAIM PRESENTED			+ 260	\$0
			<b>TOTAL</b>	<b>\$ 1300</b>

- ☒ Please charge my Eastman Kodak Company Deposit Account No. **05-0225** in the amount of \$ 1300.  
**A duplicate copy of this sheet is enclosed**
- ☒ The Assistant Commissioner is hereby authorized to charge any additional filing fees required under 37 CFR 1.16 or credit any overpayment to Eastman Kodak Company Deposit Account No. **05-0225**.  
**A duplicate copy of this sheet is enclosed.**

Frank Pincelli/gmm  
Telephone: (716) 726-1111  
Facsimile: (716) 726-9178

Frank Pincelli  
Attorney for Applicants  
Registration No. 27,370

REGULAR

Application Based on

Docket **79296F-P**

Inventors: David L. Patton, John R. Fredlund and John D. Buhr

**METHOD AND APPARATUS FOR MAKING A PRINT HAVING AN  
INVISIBLE COORDINATE SYSTEM**

Assistant Commissioner for Patents,  
ATTN: BOX PATENT APPLICATION  
Washington, D. C. 20231

Express Mail Label No.: EM365154021US

Date: June 24, 1999

664290-5096360

**METHOD AND APPARATUS FOR MAKING A PRINT**  
**HAVING AN INVISIBLE COORDINATE SYSTEM**

**FIELD OF THE INVENTION**

The present invention relates to encoding data onto a pictorial  
5   hardcopy print so that when the pictorial hardcopy print is digitally scanned by a  
scanner for reprinting and/or displaying of the image, the data provided on the  
print can be used to provide information about the image content and/or provide  
other informational data.

**BACKGROUND OF THE INVENTION**

10           In the prior art it has been suggested providing informational data  
on the hardcopy print in a manner that is visually indistinguishable from the  
image. For example, it has been suggested in various patent applications the  
printing of a hardcopy print using digital printing techniques wherein  
informational data is embedded in the image. Examples are set forth in copending  
15   U.S. Serial No. 08/565,804, filed November 30, 1995, by Scott J. Daly et al,  
entitled METHOD FOR EMBEDDING DIGITAL INFORMATION IN AN  
IMAGE; U.S. Serial No. 08/596,818, filed February 5, 1996, by Scott J. Daly,  
entitled METHOD AND APPARATUS FOR HIDING ONE IMAGE OR  
PATTERN WITHIN ANOTHER; U.S. Serial No. 08/768,679, filed December 18,  
20   1996, by Chris W. Honsinger et al, entitled METHOD FOR DETECTING  
ROTATION AND MAGNIFICATION AND IMAGES; and U.S. Serial No.  
08/842,112, filed April 28, 1997, by Chris W. Honsinger et al, entitled METHOD  
FOR GENERATING AN IMPROVED CARRIER FOR USE IN AN IMAGE  
DATA EMBEDDING APPLICATION. It has also been suggested in copending,  
25   commonly assigned U.S. Serial No. 09/211,234, filed December 14, 1998, by  
David L. Patton et al, entitled AUTO RESTORATION OF A PRINT, a means for  
providing a coordinate system, which is embedded into the digitally formed  
image, which can be used in relating other informational data that has also been  
encoded on the print to later printing and/or displaying of the image. All of the  
30   above U.S. applications are hereby incorporated by reference.

033605-0349  
664290-5095550

09339605-062499

A problem with the foregoing disclosures is that in order to provide the informational data on the print which is not visible, digital printing techniques are used at the time of printing of the original print. This suffers from several drawbacks. First, this does not allow the addition of additional information later on. Secondly, while the original image is not distorted at some point, in order to avoid further degradation of the image the amount of information allowed is limited. In addition, this system also requires a scanner or computer techniques for observing of the information encoded in the hardcopy print.

Applicants have provided an improved method and apparatus wherein information can be put on the hardcopy print at the time of manufacturing of the print, or at some later date, which can be easily read and associated with the image.

### SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention there is provided a method for making a digital print, comprising the steps of:

- a) obtaining a digital image file containing an image for printing by a digital printer;
- b) printing onto a media using a digital printer on the image;
- and
- c) printing a coordinate system that is not being visible to the human eye under normal viewing conditions separate from the printing of the image, the coordinate system being capable of locating a specific area of the image on the print.

In accordance with another aspect of the present invention there is provided a method for making a digital print, comprising the steps of:

- a) obtaining a print containing an image; and
- b) printing a coordinate system on the print over the image, the coordinate system is not visible to the human eye under normal viewing conditions and is separate the image, the coordinate system being capable of locating a specific area of the image on the print.

In accordance with yet another aspect of the present invention there is provided a print containing an image made using a digital printer and a coordinate system separate from the image made by a digital printer on the same side as the image, the coordinate system not being visible to the human eye under normal viewing conditions and capable of locating a specific location on the image.

In accordance with still another aspect of the present invention there is provided a digital printer comprising:

a first printing mechanism for digitally printing a visible image on a media; and

a second printing mechanism for digitally printing a coordinate system that is not visible to the human eye under normal viewing conditions on the media.

In another aspect of the present invention there is provided a media for use in a digital printer, the media having a printing side and a back side, the printing side having a coordinate system printed thereon which is not visible to the human eye under normal viewing conditions.

In accordance with a further aspect of the present invention there is provided a method for printing an image on a media having a pre-printed coordinate system thereon, the pre-printed coordinate system is not visible to the human eye under normal viewing conditions, the method comprising the steps of:

- a) scanning the media so as to determine if the pre-printed coordinate system is provided thereon;
- b) providing an image to be printed on the media which has information specific to a particular location on the image which can be defined by the coordinate system; and
- c) printing an image on the media in accordance with the data for printing the image with respect to the coordinate system.

In yet still another aspect of the present invention there is provided a digital printer for printing an image onto a media having a pre-printed coordinate

system printed thereon, the coordinate system not being visible to the human eye under normal viewing conditions, the printer having means for printing an image on the media, the image having a predetermined relationship with respect to the coordinate system.

5                   In yet another aspect of the present invention there is provided a computer program product comprising a computer readable storage medium having a computer program stored therein which when loaded in a computer will enable a digital printer to perform the step of:

                  a)     printing an image and a predetermined coordinate system  
10   on a medium, the coordinate system not being visible to the human eye under normal viewing conditions, the image having associated data relating to a particular aspect with respect to a location defined by the coordinate system.

                  In another aspect of the present invention there is provided a computer program product comprising a computer readable storage medium  
15   having a computer program stored therein which when loaded in a computer will enable a digital printer to perform the steps of:

                  b)     relating a digital image with respect to a predetermined coordinate system; and  
                  c)     printing the digital image on a media having the coordinate  
20   system, the coordinate system not being visible to the human eye under normal viewing conditions.

                  The above, and other objects, advantages and novel features of the present invention will become more apparent from the accompanying detailed description thereof when considered in conjunction with the following drawings.

25                   **BRIEF DESCRIPTION OF THE DRAWINGS**

                  In the detailed description of the preferred embodiments of the invention presented below, reference is made to the accompanying drawings in which:

                  Fig. 1 is a typical hardcopy print having an image thereon;

0933605-06249  
54290-5996650

Fig. 2 is a view similar to Fig. 1 illustrating the invention of the present application;

Fig. 3 is a schematic illustration of a printer for producing a hardcopy print in accordance with the present invention;

5 Fig. 4 is a schematic diagram of the system for scanning a hardcopy print made in accordance with the present invention whereby information is used for printing, displaying, or storing of the information scanned;

Fig. 5 is a schematic illustration of a modified system made in accordance with the present invention;

10 Fig. 6 is a plan view of a display screen illustrating an image made in accordance with the present invention;

Fig. 7 is a hardcopy print made from information obtained during scanning;

15 Fig. 8 is a plan view of a print illustrating an image obtained from scanning a print made in accordance with the present invention illustrating the embedded data printed thereon;

Fig. 9 is a plan view of a display device illustrating the image in a modified format;

Fig. 10 is a view similar to Fig. 9 without the coordinate system;

20 Fig. 11 is a plan elevational view of the hardcopy print made in accordance with the present invention illustrating the encoded informational data provided thereon; and

Fig. 12 is a sheet of media with a preprinted coordinate system.

#### **DETAILED DESCRIPTION OF THE INVENTION**

25 The present description will be directed in particular to elements forming part of, or in cooperation more directly with, the method and apparatus in accordance with the present invention. It being understood that elements not specifically shown or described may take various forms well known to those skilled in the art.

09339605-062499

Referring to Fig. 1, there is illustrated a hardcopy print 10 made in accordance with the present invention. The print 10 includes a digital image 12 placed thereon by a variety of known printing techniques. For example, but not by way of limitation, an image may be produced by optically or digitally printing the image 12 on a photosensitive media, for example, photographic paper, photographic film, or maybe printed on any other hardcopy media by any other known printing devices such as inkjet, thermal, LED, CRT, laser, etc. In the embodiment illustrated, print 10 is a photographic print having a color image 12 formed thereon by either a digital or optical printer. In addition to the image provided thereon, additional encoded information may be provided thereon, which is undetectable by the viewer. In the particular embodiment illustrated, this is accomplished by providing a printer, which can print directly on the hardcopy print information not normally visible by a viewer under normal viewing conditions. In the particular embodiment illustrated, this is obtained by using an infrared ink which is printed on the hardcopy print 10 after the image has been fully formed thereon. An example of a suitable ink may be obtained from the Eastman Kodak Company, under the tradename N.I.R.F. (near-infrared fluorophore). The information/indicia is printed on the print 10 so as to enable scanning thereon, which contains information that relates it to the image. In order to accomplish such, it is necessary to provide a coordinate system and information to be read.

Referring to Fig. 2, there is illustrated the print 10 of Fig. 1 illustrating information which is not normally visible in section 18 which can be read by a scanner. The information in section 18 (shown by dash lines) typically contains information which relates to the image on print 10. Preferably, as illustrated, print 10 includes a coordinate system 16 which provides a reference whereby certain features/items in the image 12 can be located and identified. The coordinate system 16 is also not normally visible by the viewer under normal viewing conditions, but can be scanned by a scanner. Preferably, as illustrated,

0339605, 06249



the information 18 and coordinate system 16 are provided on the same side and directly over the image 12.

In the particular embodiment illustrated, image 12 illustrates two individuals 20,22 in a scene which includes a house 24 and mountains 26,28.

5 Additional information can be provided in machine-readable or human-readable form, which relate to the items in image 12. For example, informational section 18 may include the names of the individuals 20,22. Coordinate system 16 allows easy identification of the individuals or other items within the image 12. When the image 12 is scanned by a digital scanner, both the information relating to the  
10 image 12 and the information within section 18 is obtained in a single scanning operation. In the preferred embodiment, information within section 18 may further include a code 32 for identifying the particular type information contained therein, including information stating that the hardcopy print does include encoded information. In addition, the names of the individuals 20,22, mountains 26,28 and  
15 identification of items such as the house 24 can be provided. The coordinate system 16 allows the locating and identification of these items, which then can be later visually displayed, for example, on a CRT, or used to produce a second hardcopy print wherein the information is actually placed thereon without affecting or detracting from the visual appearance of the image 12.

20 Referring to Fig. 3, there is illustrated in schematic form a printer 40 capable of printing onto a hardcopy print 10 using an ink, which is not normally visible by a viewer under normal viewing conditions. In the particular embodiment illustrated, printer 40 is an inkjet printer having a printhead 42 designed to apply any desired image appropriate on the media 43 as it passes  
25 therethrough. The printhead 42 prints directly over image 12 on print 10, however, since an invisible ink is being applied, the image 12 will be viewed as it would normally be viewed. The printer 40 includes an inlet/supply tray 44 for receiving media 43, such as hardcopy print 10, an outlet tray for retaining media that has been passed through the printer, and a printing path along which the  
30 photosensitive media passes from supply tray to outlet tray 46. The printhead 42

09339605 062499

is positioned with respect to the printing path so as to provide printing onto media 43 as it passes thereby. An appropriate transport mechanism, not shown, is provided for transporting of the media from the supply tray 44 along the printing path 14 to outlet tray 46. In the embodiment illustrated, the hardcopy print 10 already has an image formed thereon in which case the informational data and coordinate system 16 is placed thereon by the printer 40. Thus, the informational data and coordinate system are separate from the image and printed at a different time. This information can be inputted in a variety of different manners. For example, the image could have been previously scanned and the information provided to a computer, such as a PC, and an appropriate software program could have been provided for illustrating a grid system and allowing of entry of information with respect to the grid system. For example, a mouse or other similar type control unit could have been used to identify certain areas of the image scanned and appropriate data/information can be entered with respect to such location for identifying persons, places, or things, and this information can be stored to a record file, which can be then forwarded over to a printer 40 for printing. The information regarding the image can be entered and/or forwarded to the printer 40 by a variety of known techniques, including hardwire connection or by the internet. Optionally, as illustrated in Fig. 3, the printer may be provided with a scanner 50, which scans the image prior to reaching the printhead 42 where the printhead provides the image. In particular, the image on hardcopy print 10 is scanned by the scanner 50 and displayed on display device 52, for example, a CRT or liquid crystal display. The printer 40 is controlled by an appropriate computer 54 whereby a super-imposed grid system can be provided over the image scanned and data entry can be entered through keyboard 56, or any other input device. The information is appropriately encoded and printed onto the image 12 through the use of printhead 42. Thus, the hardcopy print 10 leaving the printer 40 at outlet tray 46 will have thereon appropriate encoded information and an orientation system for properly identifying and using said information. The information in section 18 may also contain a code which can be read by a scanner

which will identify that the hardcopy print 10 is of the type containing such information and the appropriate information necessary for interpreting the information, including the type of reference orientation provided thereon. Thus, the hardcopy print 10 will allow normal viewing of the image, yet when scanned  
5 by an appropriate scanner, will be able to read so as to obtain information not normally visible, which can then later be used for displaying, storing, or producing a hardcopy print which includes such information.

With respect to the ink used by printhead 42, the ink is such that it cannot be normally viewed by individuals, but is still capable of being read by a  
10 digital scanner. The scanner 30 may of any type digital scanner, for example, but not by way of limitation, AVISION 630CS, HP Scanjet 5100C, UMAX Powerlook 200, and Epson ES-1200C. Modification of these scanners is necessary to make the scanner to sense the infrared ink not normally visible. For example, the infrared blocking filter used to prevent infrared light from being  
15 sensed by the imager may be selectively removed when it is desired to scan the infrared record. Alternatively, a separate channel for sensing infrared light may be added to the imaging head. Additionally, an infrared light source may need to be added to the scanner. However, it is to be understood that any appropriate other digital scanner may be employed.

Referring to Fig. 4, there is illustrated a modified printing  
20 apparatus 70 made in accordance with the present invention. This apparatus 70 is similar to printing apparatus 40, like numerals indicating like parts and like operation. A printhead 72 is provided for printing of a digital image obtained from a digital image file/record onto the media passing thereby along printing path  
25 48. In the particular embodiment illustrated, the printhead 72 comprises an inkjet printhead, however, it is to be understood that any other desired digital printing system may be employed in place of printhead 72. The apparatus 70 includes a second printing system 74, which in the particular embodiment illustrated comprises a digital inkjet printhead 75 similar in operation and construction to  
30 printhead 72. The printhead 75 produces a orientation grid and data information

as previously discussed with respect to printhead 42. A sufficient amount of spacing is provided between the printheads 72,74 such that the ink being applied by one will not substantially affect the ink being applied by the other.

While in the particular embodiment illustrated in Fig. 4 the image  
5 10 is first produced on the media 43, followed by the placement of the information and grid, the present invention is not so limited. In particular, the location of the printheads 72,75 may be switched in their respective positions such that the invisible ink is placed on the media prior to formation of the customer generated image. Thus, the image applied by printhead 72 is provided after the application  
10 of the information and/or orientation system provided by printhead 75. The ink being applied is of such a nature that it can still be observed by a scanner through the image applied by printhead 72. An example of a suitable ink used for printing of the customer image is sold by Eastman Kodak Company under the tradename KODAK PROFESSIONAL DYE INKS and an appropriate suitable ink for  
15 placement of the information and grid by printhead 72 is sold by Eastman Chemical Company under the tradename N.I.R.F. (near-infrared fluorophore) inks.

Referring to Fig. 5, there is illustrated a scanner and output system, which may be used to scan a hardcopy print 10 of the type having encoded invisible information as previously discussed. In particular, the system includes a  
20 digital scanner 30, which may be of any digital type as commonly available, for example, but not by way of limitation, a Vision 630CS, HP Scanjet 5100C, Newmax Power Look 200 and Epson ES 1200C. The image 12 on the hardcopy print 10 is scanned by scanner 30, thereby the appropriate information regarding the image is obtained as is typically done with prior art scanners. The scanner 30,  
25 in the embodiment illustrated, has been programmed to recognize and read informational data such as provided by section 18 and coordinate system 16. The coordinate system 16 is used primarily so that information contained in section 18 can be related to items/objects in the image 12. An appropriate computer 49 is provided for interpreting of the data obtained by scanner and is sent forward to an  
30 appropriate output device 47. The output device 47 may comprise a variety of

093965-06349  
664290-5096EE60

different digital output devices, for example, but not by way of limitation, various digital type printers, display devices, or storage memory devices whereby the information can then later be retrieved directly or through the internet, or other communication system.

5                   Referring to Fig. 6, there is illustrated an image 12 on a display screen 53 obtained from scanning hardcopy print 10 on scanner 30 wherein information provided in information section 18 is displayed with respect to the objects or persons provided in the image 12. In the particular embodiment illustrated, it can be seen that the two individuals are identified as Grandma X and  
10   Aunt Y, and that the locations provided with respect to the cabin are illustrated therein. As previously noted, the output device 47 may include a printer, in which case the image with the annotated information may be printed if so desired.

                  It is to be understood that various modifications may be made without departing from the scope of the present invention. In particular, in Fig. 2  
15   there is illustrated an coordinate system 16 in the form of an unique, symmetrical shape. However, the present invention is not limited to this particular type orientation system. Various other orientation system/patterns may be used as desired. The principal function of the coordinate system 16 is for providing a reference by which the information contained in section 18 may be associated with  
20   the particular items within the image 12. Referring to Fig. 7, there is illustrated a modified hardcopy print 10 made in accordance with the present invention. In this embodiment, there is provided an orientation system 116 in the form of a grid pattern. The information section would provide an appropriate code identifying the particular relationship with respect to the grid pattern so that particular items  
25   may be identified. It is, of course, understood that various other orientation schemes may be used as long as they are able to allow identification of particular locations within the image for locating encoded information in specific areas of the image 12.

                  In the embodiments illustrated in Fig. 2, the hardcopy print 10  
30   includes information in machine-readable format. However, the present invention

09339605, 062499  
664290, 5096660

is not so limited. For example, referring to Fig. 8 there is illustrated a hardcopy print 210 made in accordance with the present invention, like numerals indicating like parts. However, in this embodiment, a grid 119 is provided along with informational information in a corner identifying certain objects with respect to the grid. This is particularly useful when the invisible ink being used can be viewed under special viewing conditions. For example, under normal viewing conditions the ink is such that it is not visible to the viewer, however, under ultraviolet light, typically referred to as a black light, the information printed thereon would be visible. In the particular embodiment illustrated, the information is provided in association with a grid 119, however, since the information can be viewed, the grid 119 may be dispensed with, and the information may be put directly in association therewith. In such situations, the grid 119 may be maintained so that any machine-readable information can still be scanned and associated with the image for later printing and storing of the image

12.

Referring to Fig. 9, there is illustrated a modified form of the present invention illustrating a different way in which the information may be displayed. In this particular embodiment, the image scanned is illustrated on a display screen. The informational data is placed off to the one side of the image so that the image may be viewed unobstructed, yet also while in viewing the image in the unobstructed view. A grid 119 may be optionally placed over the image 12 in the situations where additional information is provided for specific identification of items within the image.

Fig. 10 is a view similar to Fig. 9 illustrating the image without the grid system.

Referring to Fig. 11, there is illustrated a modified hardcopy print 310 made in accordance with the present invention. The hardcopy print 310 is similar to hardcopy 10, like numerals indicating like parts. However, in this particular instance, the informational data is printed in the actual location being related to. Thus, in this situation, there is no need to provide a coordinate system.

Referring to Fig. 12, there is illustrated a sheet of media 400 with a preprinted coordinate system 410 in the form of a grid which is not visible to the human eye under normal viewing conditions. In the particular embodiment illustrated, the coordinate system 410 is preprinted on the media 400 using an infrared ink. The coordinate system 410 can have a specific pattern corresponds to a different type media. For example, a grid with lines spaced at 1/8 inch (3.175 mm) intervals can designate thermal media such as KODAK PROFESSIONAL EKTATHERM XLS Print Paper used with a KODAK 8650 PS Color Printer. A grid with lines spaced at 1/4 inch (6.35 mm) intervals can designate inkjet media such as KODAK Inkjet Photo Stickers which can be printed on a Hewlett Packard DeskJet 870Cxi. Similarly, the coordinate system 410 can have a specific pattern which corresponds to a specific image type to be placed thereon. For example, a grid with dashed lines can designate an image originated from a digital file, while a grid with solid lines can designate an image originating from an optically captured image. Likewise, a specific pattern may indicate a professionally generated image. Care must be taken to insure the media type corresponding to the type of image being printed is used. If the media is scanned prior to printing, the printing application can indicate which media is appropriate and refuse to print for improper matches of file type and media. Additionally, in the case of professional images, the grid pattern may indicate ownership of the imagery, and can be used to prevent enabled stations from copying the image and also be used as a means for identifying the material is copyrighted.

An image is printed on a media 400 having a pre-printed coordinate system 410 such as the grid not being visible to the human eye under normal viewing conditions, by first scanning the media using a scanner 30 (See Fig. 5), or the printer 40 (See Fig. 3) to determine the type and location of the pre-printed coordinate system 410 provided. Then providing an image 12 (See Fig. 1) to be printed which has information 18, such as illustrated in Fig. 8, relating to a particular location on the image which can be defined by the coordinate system and

printing the image on the media in accordance with the data with respect to the coordinate system.

Alternatively, the user may indicate to the printing device which type of media is being used and which type coordinate system is to be applied thereto. Thus, the media need not be scanned for the invisible printed matter. Various other changes and modifications may be employed. For example, any desired media may be used and any desired digital printing technology may be employed, such as electrophotography or thermal printing. Additionally, when thermal printing is used, the clear top layer of the thermal media may contain the coordinate system.

The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the scope of the invention.

06339605, 063490



**PARTS LIST**

10	hardcopy print
12	digital image
14	printing path
16	coordinate system
18	information section
20	individual
22	individual
24	house
26	mountain
28	mountain
30	scanner
32	code
40	printer
42	printhead
43	media
44	inlet/supply
46	outlet tray
47	output device
48	printing path
49	computer
50	scanner
52	display device
53	display screen
54	computer
56	keyboard
70	printing apparatus
72	printhead
74	printing system
75	digital printhead

09339605 06349  
664230 5096660

116	orientation system
119	grid
210	hardcopy print
310	hardcopy print
400	media
410	preprinted coordinate system

664290" 5035EE60

**WHAT IS CLAIMED IS:**

1. A method for making a digital print, comprising the steps of:
  - a) obtaining a digital image file containing an image for printing by a digital printer;
  - b) printing onto a media using a digital printer on said image; and
  - c) printing a coordinate system that is not being visible to the human eye under normal viewing conditions separate from said printing of said image, said coordinate system being capable of locating a specific area of said image on said print.
2. A method according to claim 1 further comprising the step of providing information with respect to said specific area.
3. A method according to claim 2 wherein said information and/or coordinate system is printed directly over said image.
4. A method for making a digital print, comprising the steps of:
  - a) obtaining a print containing an image; and
  - b) printing a coordinate system on said print over said image, said coordinate system is not visible to the human eye under normal viewing conditions and is separate said image, said coordinate system being capable of locating a specific area of said image on said print.
5. A method according to claim 3 further comprising the step of providing information with respect to said specific area.

003965-049  
B6H230" 5095EE0

6. A method according to claim 3 wherein said information and/or coordinate system is printed directly over said image.

7. A print containing an image made using a digital printer and a coordinate system separate from said image made by a digital printer on the same side as said image, said coordinate system not being visible to the human eye under normal viewing conditions and capable of locating a specific location on said image.

8. A print according to claim 7, said print further comprising additional data which is also not visible to the human eye under normal viewing conditions printed on the same side as said image.

9. A print according to claim 8 wherein said print is made from a photosensitive media.

10. A print according to claim 9 wherein said photosensitive media comprises photographic paper.

11. A print according to claim 7 wherein said digital printer comprises one of the following type digital printers: thermal, inkjet, laser, LED, LCD, or electrophotographic.

12. A digital printer comprising:  
a first printing mechanism for digitally printing a visible image on a media; and  
a second printing mechanism for digitally printing a coordinate system that is not visible to the human eye under normal viewing conditions on said media.

09339605-062499

13. A digital printer according to claim 12 wherein said first or second printing mechanism comprises one of the following type digital printers: thermal, inkjet, laser, LED, LCD, or electrophotographic.

14. A digital printer according to claim 13 wherein said first printing and second printing mechanism comprises the same digital printer.

15. A media for use in a digital printer, said media having a printing side and a back side, said printing side having a coordinate system printed thereon which is not visible to the human eye under normal viewing conditions.

16. A media according to claim 15 wherein said coordinate system is provided in a specific pattern which designates information relating to said media or image to be placed thereon.

17. A media according to claim 16 wherein each specific pattern corresponds to a different type media.

18. A method for printing an image on a media having a pre-printed coordinate system thereon, said pre-printed coordinate system is not visible to the human eye under normal viewing conditions, said method comprising the steps of:

- a) scanning said media so as to determine if said pre-printed coordinate system is provided thereon;
- b) providing an image to be printed on said media which has information specific to a particular location on said image which can be defined by said coordinate system; and
- c) printing an image on said media in accordance with said data for printing said image with respect to said coordinate system.

09349605-062499

19. A method according to claim 18 further comprising the step of modifying the image prior to printing.

20. A method according to claim 19 wherein said step of modifying said image comprises cropping and/or enlarging said image.

21. A digital printer for printing an image onto a media having a pre-printed coordinate system printed thereon, said coordinate system not being visible to the human eye under normal viewing conditions, said printer having means for printing an image on said media, said image having a predetermined relationship with respect to said coordinate system.

22. A device according to claim 21 wherein device includes a sensor for determining if said media has a predefined coordinate system.

23. A computer program product, comprising a computer readable storage medium having a computer program stored therein which when loaded in a computer will enable a digital printer to perform the step of:

a) printing an image and a predetermined coordinate system on a medium, said coordinate system not being visible to the human eye under normal viewing conditions, said image having associated data relating to a particular aspect with respect to a location defined by said coordinate system.

24. A computer program product, comprising a computer readable storage medium having a computer program stored therein which when loaded in a computer will enable a digital printer to perform the steps of:

b) relating a digital image with respect to a predetermined coordinate system; and

09339605 062499

c) printing said digital image and on a media having said coordinate system, said coordinate system not being visible to the human eye under normal viewing conditions.

24. A computer program product according to claim 24 wherein said image having a predetermined relationship with said coordinate system, said image having associated data relating a particular aspect with respect to a location defined by said coordinate system.

003960-0249  
664290-9096260

# **ABSTRACT OF THE DISCLOSURE**

A print and method of making a print having a invisible coordinate system on the same side as the image using a digital printer. The print may include additional invisible information which relates to specific parts of the  
5 image.

05330605 0624199





093605, 03499  
664240, 5096860

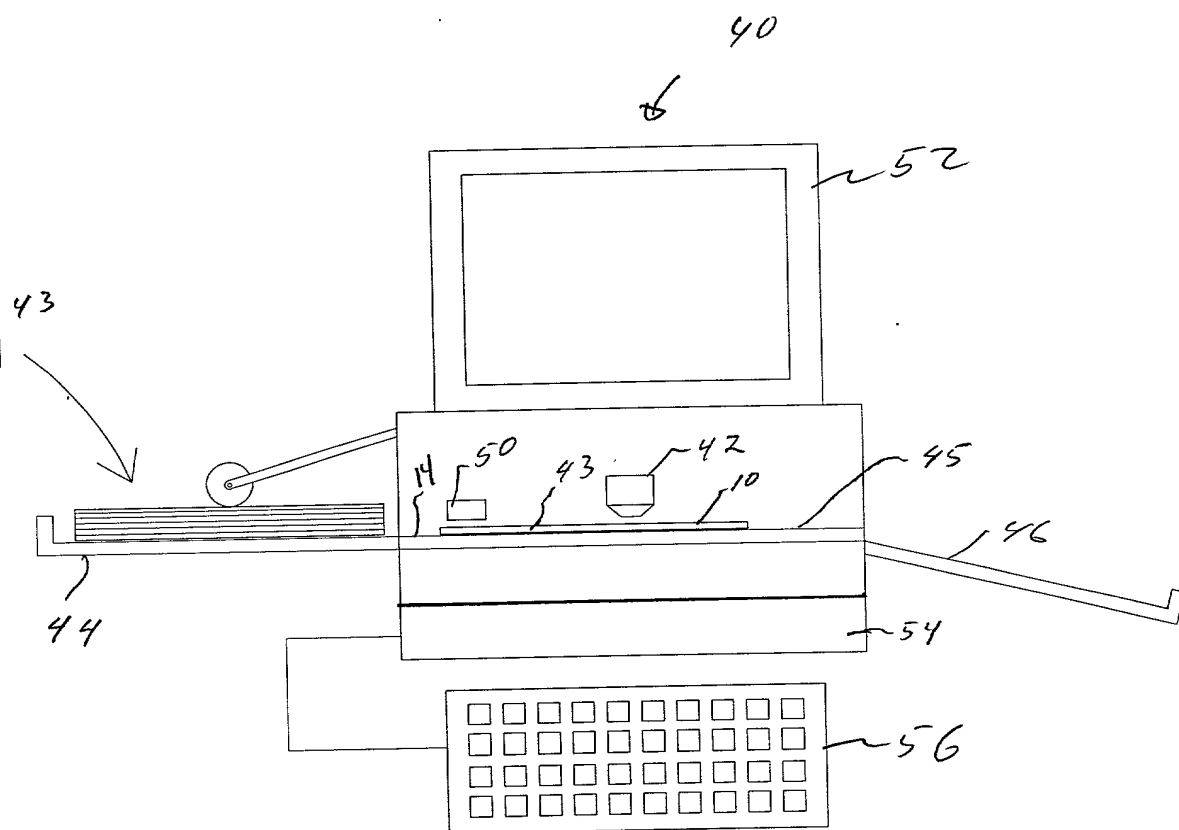


FIG. 3

0339605, 052449

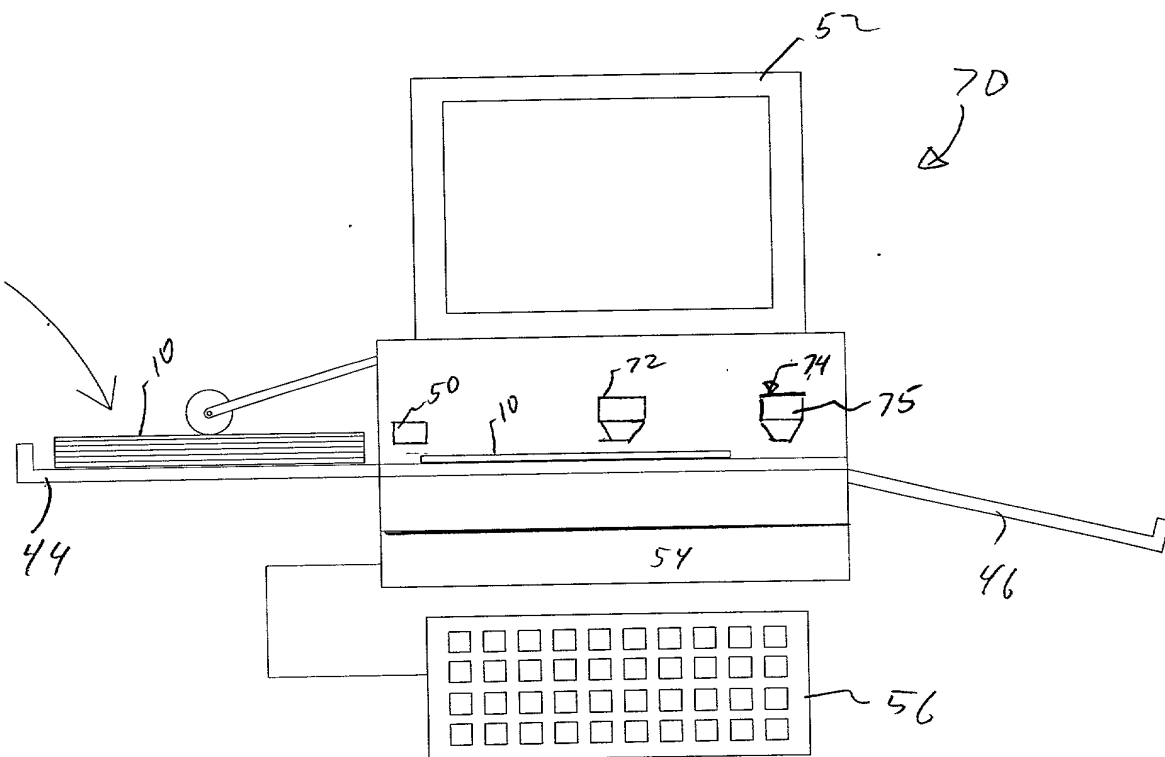


FIG. 41

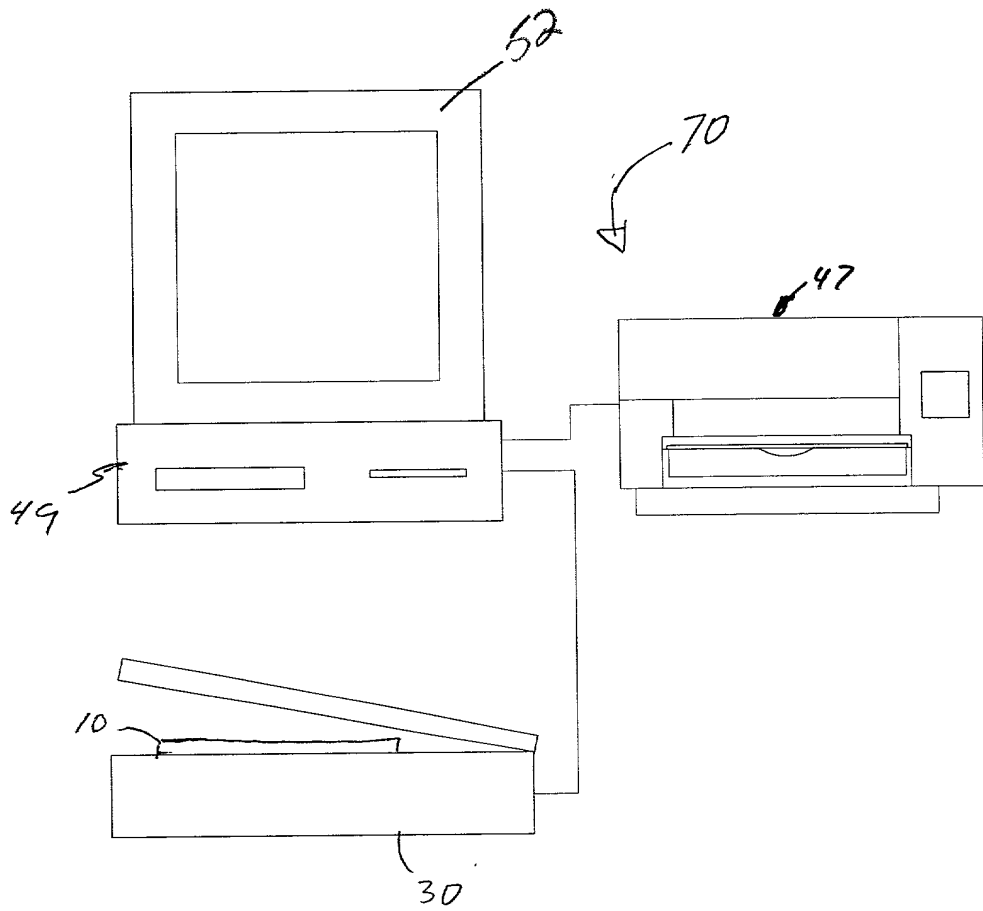


FIG. 5

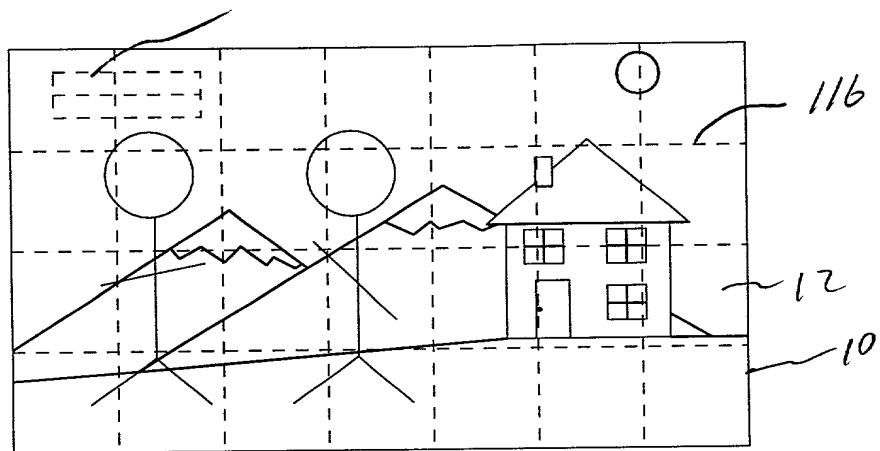


FIG. 7

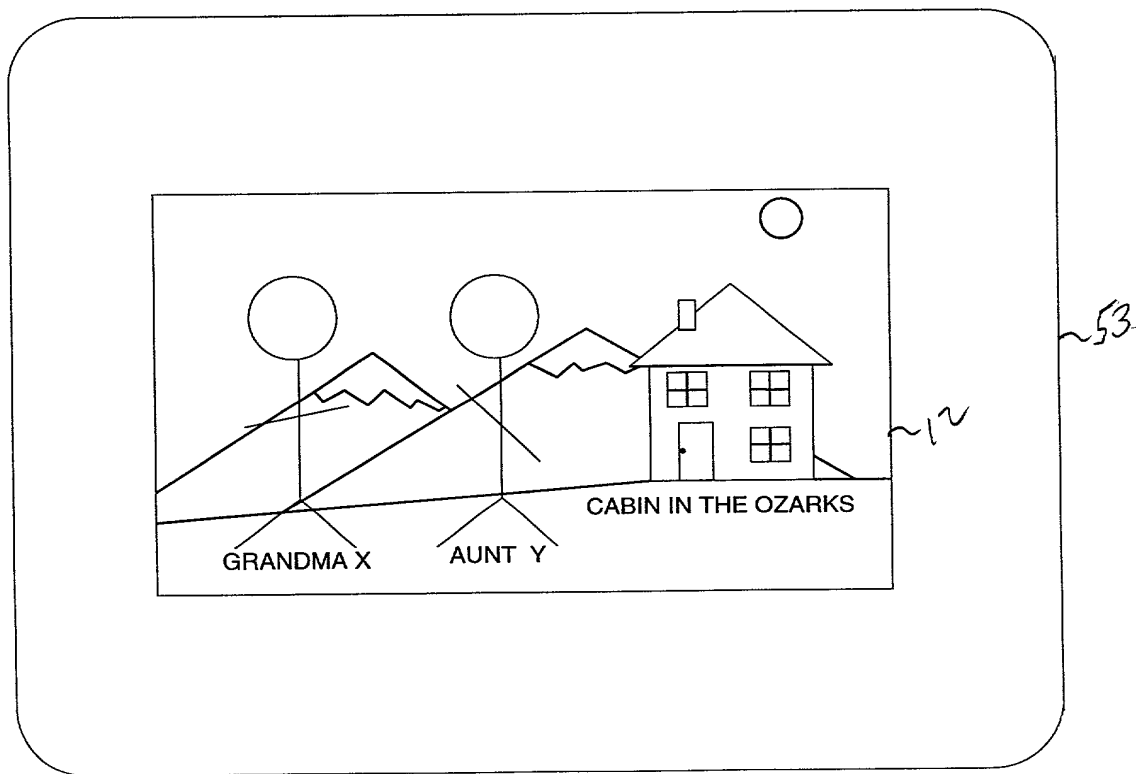


FIG. 6

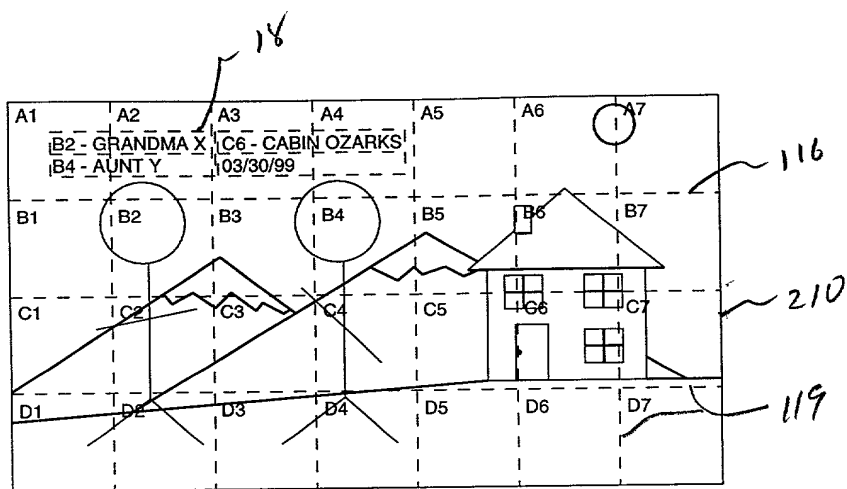


FIG. 8



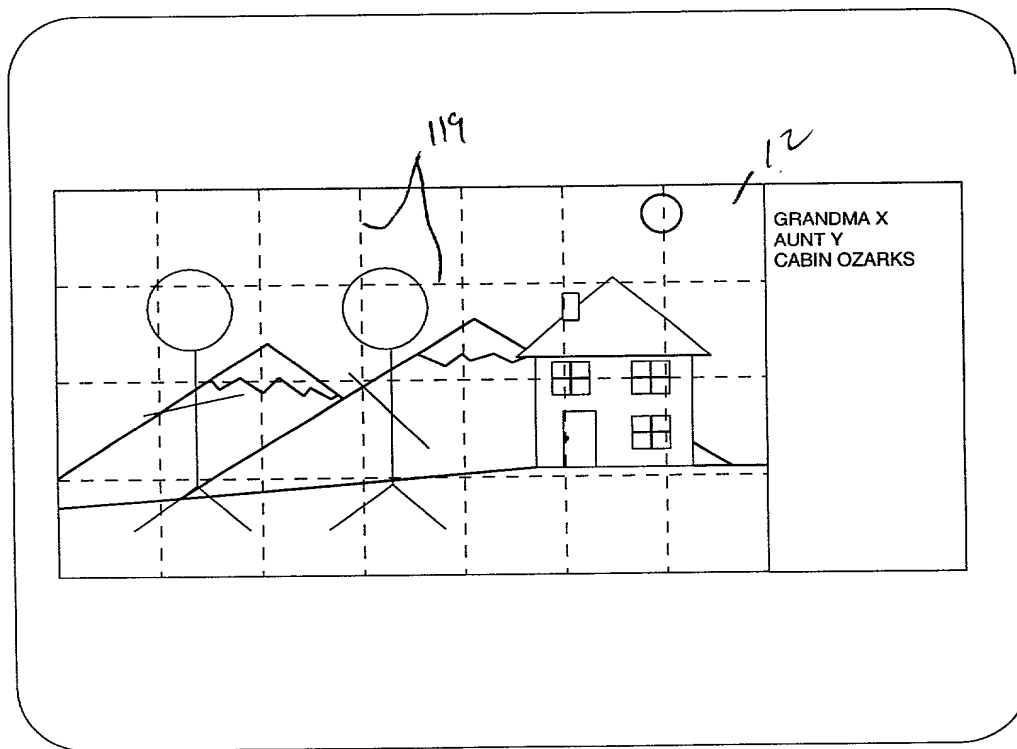


FIG. 9

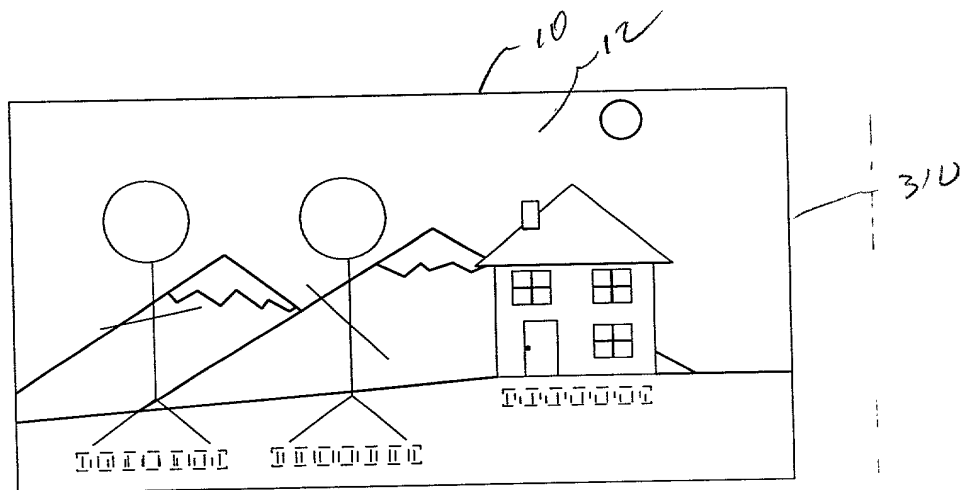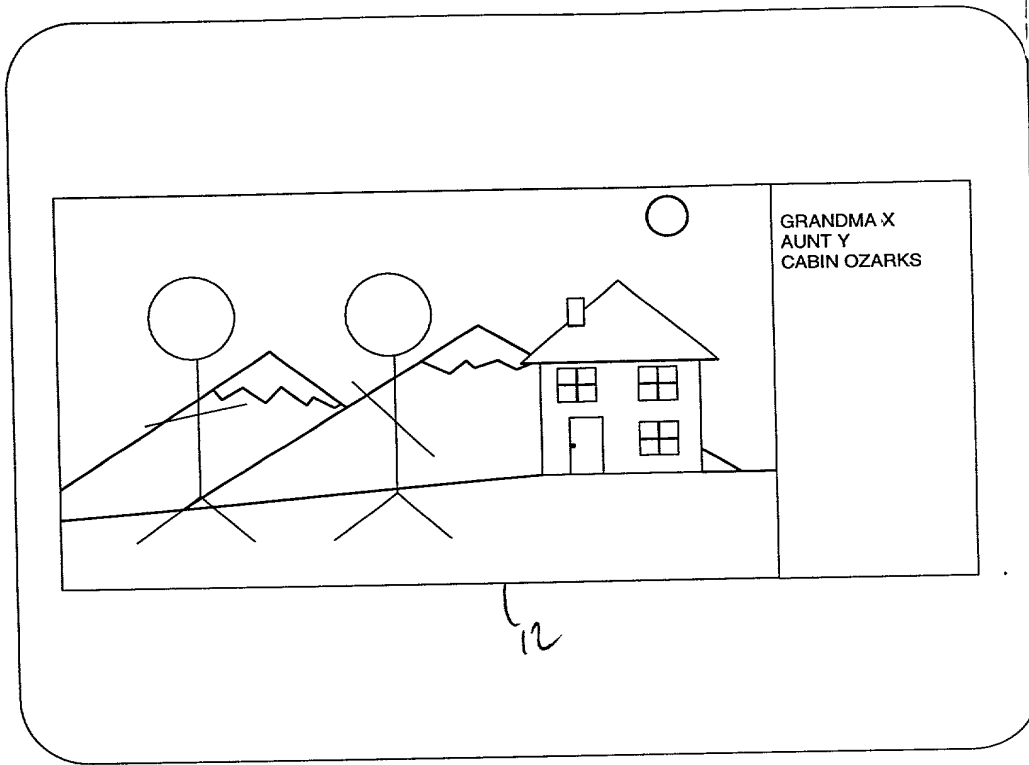

664290" 5096EE60

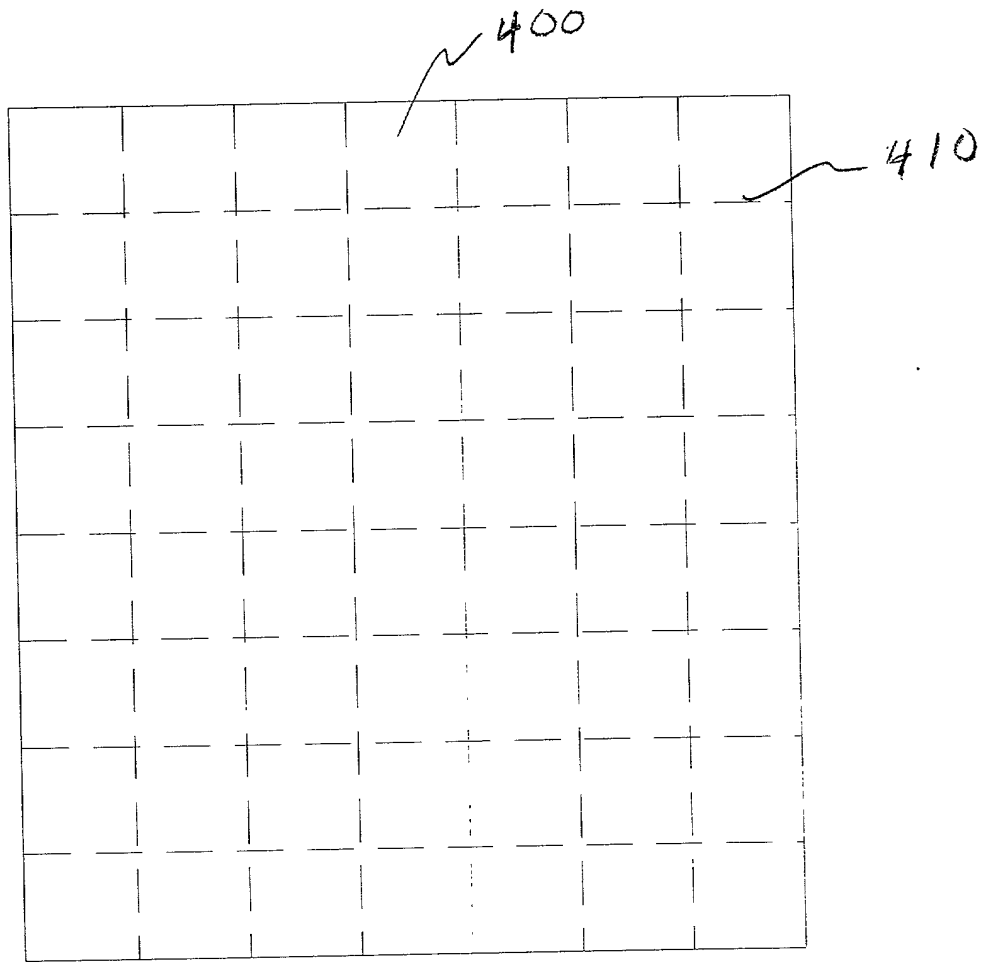


FIG. 12



## Combined Declaration For Patent Application and Power of Attorney

ATTORNEY DOCKET  
79296F-P

As below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**METHOD AND APPARATUS FOR MAKING A PRINT HAVING AN INVISIBLE COORDINATE SYSTEM**

The specification of which (check only one item below):

- ☒ is attached hereto.
- ☐ was filed as United States Application Serial No. on and was amended on (if applicable).
- ☐ was filed as PCT international application Number on and was amended under PCT Article 19 on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent &amp; Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign applications(s) for patent or inventor's certificate or any PCT international application(s) designating a least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

**PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:**

COUNTRY (if PCT, indicate PCT)	APPLICATION NUMBER	DATE OF FILING (day month year)	PRIORITY CLAIMED UNDER 35 USC §119		
			YES		NO
			YES		NO
			YES		NO

I hereby claim the benefit under Title 35, United States Code, 119 §(e) of any United States provisional application(s) listed below:

**PRIOR PROVISIONAL APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. §119 (e):**

PROVISIONAL APPLICATION NUMBER	FILING DATE

I hereby claim the benefit under Title 35, United States Code, §120 of any prior United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior applications(s) in the manner provided by the first paragraph of Title 35, §112, I acknowledge the duty to disclose to the U.S. Patent &amp; Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations §1.56, which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

**PRIOR US APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S FOR BENEFIT UNDER 35USC§120:**

U.S. APPLICATIONS			STATUS (Check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE		PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.					
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)			

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (*List name and registration number*)

**Frank Pincelli, Registration No. 27,370**  
**Thomas H. Close, Registration No. 27,428**  
**J. Lanny Tucker, Registration No. 27,678**  
**Sarah Meeks Roberts, Registration No. 33,447**  
**Arthur H. Rosenstein, Registration No. 24,352**  
**Milton S. Sales, Registration No. 24,516**

## Send Correspondence to:




Milton S. Sales  
 Eastman Kodak Company  
 Patent Legal Staff  
 Rochester, NY 14650-2201

Direct Telephone Calls to:  
(name and telephone number)

Frank Pincelli  
 (716) 726-1111  
 FAX: (716) 726-9178

2	FULL NAME OF INVENTOR	FAMILY NAME Patton	FIRST GIVEN NAME David	SECOND GIVEN NAME L.
0	RESIDENCE & CITIZENSHIP	CITY Webster	STATE OR FOREIGN COUNTRY New York 14580 USA	COUNTRY OF CITIZENSHIP USA
1	BUSINESS ADDRESS	BUSINESS ADDRESS Eastman Kodak Company	CITY 343 State Street, Rochester	STATE & ZIP CODE (COUNTRY) New York 14650 USA
2	FULL NAME OF INVENTOR	FAMILY NAME Fredlund	FIRST GIVEN NAME John	SECOND GIVEN NAME R.
0	RESIDENCE & CITIZENSHIP	CITY Rochester	STATE OR FOREIGN COUNTRY New York 14626 USA	COUNTRY OF CITIZENSHIP USA
2	BUSINESS ADDRESS	BUSINESS ADDRESS Eastman Kodak Company	CITY 343 State Street, Rochester	STATE & ZIP CODE (COUNTRY) New York 14650 USA
2	FULL NAME OF INVENTOR	FAMILY NAME Buhr	FIRST GIVEN NAME John	SECOND GIVEN NAME D.
0	RESIDENCE & CITIZENSHIP	CITY Webster	STATE OR FOREIGN COUNTRY New York 14580 USA	COUNTRY OF CITIZENSHIP USA
3	BUSINESS ADDRESS	BUSINESS ADDRESS Eastman Kodak Company	CITY 343 State Street, Rochester	STATE & ZIP CODE (COUNTRY) New York 14650 USA
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
4	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
5	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)
2	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
0	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
6	BUSINESS ADDRESS	BUSINESS ADDRESS	CITY	STATE & ZIP CODE (COUNTRY)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 201 	SIGNATURE OF INVENTOR 202 	SIGNATURE OF INVENTOR 203 
DATE June 23, 1995	DATE 22-JUN-99	DATE 6/23/99
SIGNATURE OF INVENTOR 204	SIGNATURE OF INVENTOR 205	SIGNATURE OF INVENTOR 206
DATE	DATE	DATE